



TOWEL RAILS

BELEN - ROBERTA

100% MADE IN ITALY

CATALOGUE PRICE LIST

2026

Cordivari company has a proven industrial tradition and is now one of the most important manufacturers in the heating and plumbing industry in Italy. Founded in 1972 by Ercole Cordivari, the company is producing calorifiers & buffer tanks, solar thermal systems, compressed air receivers, design radiators and fan coil units.

Cordivari plants are situated on an area of 370.000 square meters and employs more than 700 employees. All products are designed and manufactured in the company's production facilities, ensuring total "Made in Italy" quality. Thanks to its development strategies, to new technologies and to the training of new human focused resources, Cordivari is equipped with modern structures and advanced production processes.

Sustainability-oriented choices allow for productive and research activities to be carried out in full respect for people and environment. The company operates according to the UNI EN ISO 14001 Environmental Management System and the UNI EN ISO 45001 Safety Management System, in addition to the UNI EN ISO 9001 Quality Management System, which ensures the full quality and reliability of the products. The highly qualified management, the constant research for innovative solutions and the extremely customer-oriented company policy, stands for the leading market position and the exclusive know-how in the field of integrated heating systems, that the Cordivari group has acquired. All this is the result of a continuous commitment to achieve Customer Satisfaction.



Cav. Ercole Cordivari



MATERIAL:

- 30x40 mm semi oval collectors in painted mild steel.
- Ø 25 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders. Certificate DIN 55900-1,-2.

COLOR:

R01-RAL 9010 WHITE.

AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy

FEATURES

Max pressure: 8 bar	Max temperature: 110°C
Functioning: Hot water	Connections: n° 2 da 1/2" G - 1 da 1/2" G

CERTIFICATIONS



ACCESSORIES

For Accessories range see ACCESSORIES CHAPTER



**Total Color
Kristal Valve**

For information about Kristal valves, see RADIATORS AND TOWEL RAILS CATALOGUE



**Towel Bar
White - R01**
Width= 370 mm


Applicable only for width ≥ 450 mm

Art. nr. 5991990310170 Price € 48,00




**Kit 2 Hooks
White - R01**


Art. nr. 5991990310171 Price € 30,00




Detail of the 50 mm
pipe centres version.




12 ELEMENTS

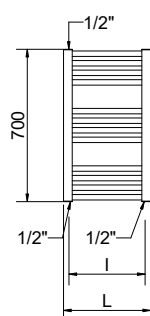



20 ELEMENTS

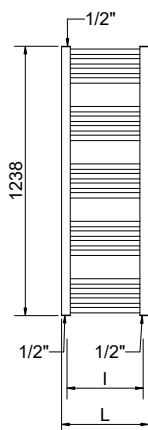

24 ELEMENTS

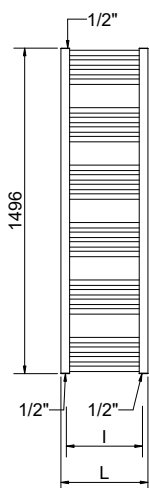

28 ELEMENTS

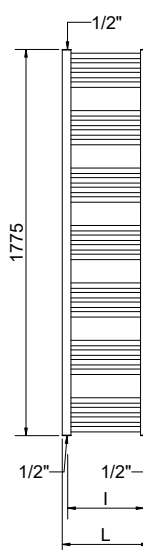

BELEN

PIPE CENTRES 50 mm

Thermal output

Height	Width	Pipe Centres	Art. nr.	Price [€]	Art. nr.	Price [€]	Dry weight	Surface	Water content	Δt 50°C	Δt 30°C	Exponent	Dual energy kit
[mm]	L [mm]	I [mm]	White R01 RAL 9010		White R01 RAL 9010		[Kg]	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
700	400	350	3551650000100	100,00	3551650000120	119,00	3,8	0,479	2,9	258	140	1,18410	-
	450	400	3551650000101	103,00	3551650000121	122,00	4,1	0,527	3,2	284	155	1,18348	300
	500	450	3551650000102	106,00	3551650000122	125,00	4,4	0,574	3,5	311	169	1,18286	300
	550	500	3551650000103	109,00	3551650000123	128,00	4,7	0,621	3,7	337	184	1,18223	300
	600	550	3551650000104	115,00	3551650000124	134,00	5,0	0,668	4,0	364	199	1,18161	300
	750	700	3551650000280	133,00	3551650000288	152,00	5,9	0,081	4,7	443	242	1,17974	400
1238	1000	950	3551650000281	167,00	3551650000289	186,00	7,3	1,010	6,0	576	315	1,17663	600
	400	350	3551650000105	139,00	3551650000125	158,00	6,6	0,817	5,0	449	241	1,21499	400
	450	400	3551650000106	141,00	3551650000126	160,00	7,1	0,896	5,5	492	264	1,21408	500
	500	450	3551650000107	143,00	3551650000127	162,00	7,6	0,974	5,9	534	287	1,21316	500
	550	500	3551650000108	150,00	3551650000128	169,00	8,0	1,053	6,3	577	310	1,21224	600
	600	550	3551650000109	153,00	3551650000129	172,00	8,5	1,131	6,8	619	333	1,21133	600
1496	750	700	3551650000282	178,00	3551650000290	197,00	9,9	1,366	8,0	747	402	1,20858	700
	1000	950	3551650000283	224,00	3551650000291	243,00	12,3	1,700	10,2	959	518	1,20401	1000
	400	350	3551650000110	164,00	3551650000130	183,00	8,0	0,983	6,1	529	284	1,21411	500
	450	400	3551650000111	171,00	3551650000131	189,00	8,5	1,077	6,6	582	313	1,21208	600
	500	450	3551650000112	179,00	3551650000132	198,00	9,1	1,172	7,1	635	342	1,21005	600
	550	500	3551650000113	181,00	3551650000133	200,00	9,7	1,266	7,6	689	371	1,20803	700
1775	600	550	3551650000114	188,00	3551650000134	207,00	10,3	1,36	8,1	742	400	1,20600	700
	750	700	3551650000284	225,00	3551650000292	244,00	12,0	1,642	9,7	902	488	1,19991	900
	1000	950	3551650000285	278,00	3551650000293	297,00	14,7	2,040	12,3	1168	636	1,18977	1200
	400	350	3551650000115	196,00	3551650000135	215,00	9,4	1,155	7,1	633	339	1,21897	600
	450	400	3551650000116	200,00	3551650000136	219,00	10,0	1,265	7,7	696	373	1,21668	700
	500	450	3551650000117	202,00	3551650000137	221,00	10,7	1,374	8,3	758	407	1,21439	700
1775	550	500	3551650000118	205,00	3551650000138	224,00	11,4	1,484	8,9	820	441	1,21210	700
	600	550	3551650000119	214,00	3551650000139	233,00	12,1	1,594	9,5	883	475	1,20981	900
	750	700	3551650000286	256,00	3551650000294	275,00	14,051	1,923	11,3	1070	578	1,20294	1000
	1000	950	3551650000287	326,00	3551650000295	345,00	17,24	2,390	14,3	1382	751	1,19148	1200

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)ⁿ



Color: **R01-RAL 9010 WHITE**

MATERIAL:

- 30x40 mm semi oval collectors in painted mild steel.
- Ø 22 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders. Certificate DIN 55900-1,-2.

COLOR:

R01-RAL 9010 WHITE.

AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy

CERTIFICATIONS



FEATURES

Max pressure: **8 bar**

Max temperature: **110°C**

Functioning: **Hot water**

Connections: **n° 2 da 1/2" G - 1 da 1/2" G**

ACCESSORIES

For Accessories range see ACCESSORIES CHAPTER



**Total Color
Kristal Valve**

For information about Kristal valves, see **RADIATORS AND TOWEL RAILS CATALOGUE**



**Towel Bar
White - R01**
Width= 370 mm

Applicable only for width ≥ 450 mm

Art. nr. **5991990310170**


Price € **48,00**




**Kit 2 Hooks
White - R01**

Art. nr. **5991990310171**


Price € **30,00**




Detail of the 50 mm
pipe centres version.




12 ELEMENTS

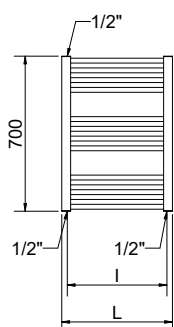



20 ELEMENTS

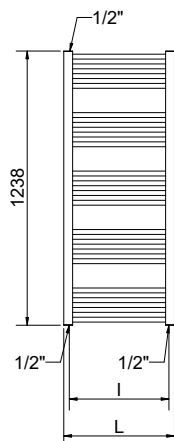

24 ELEMENTS

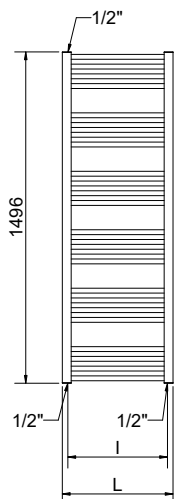

28 ELEMENTS

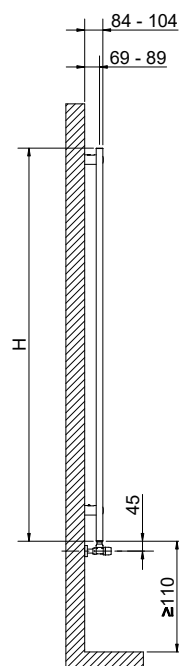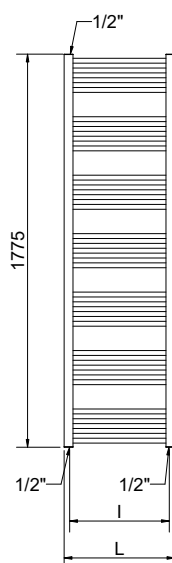

ROBERTA

PIPE CENTRES 50 mm

Thermal output

Height	Widht	Pipe Centres	Art. nr.	Price [€]	Art. nr.	Price [€]	Dry weight	Surface.	Water content	Δt 50°C	Δt 30°C	Exponent	Dual energy kit
[mm]	L [mm]	I [mm]	White R01 RAL 9010		White R01 RAL 9010		[Kg]	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
700	400	350	3551650000200	88,00	3551650000220	108,00	3,6	0,443	2,5	253	136	1,20234	-
	450	400	3551650000201	91,00	3551650000221	111,00	3,9	0,485	2,7	277	150	1,19923	-
	500	450	3551650000202	95,00	3551650000222	115,00	4,1	0,526	2,9	301	163	1,19612	300
	550	500	3551650000203	97,00	3551650000223	117,00	4,4	0,568	3,1	324	176	1,19301	300
	600	550	3551650000204	98,00	3551650000224	118,00	4,6	0,609	3,3	348	189	1,18990	300
	750	700	3551650000304	111,00	3551650000308	131,00	5,4	0,733	3,9	419	229	1,18057	400
1238	400	350	3551650000205	127,00	3551650000225	147,00	6,2	0,757	4,4	430	231	1,21106	400
	450	400	3551650000206	133,00	3551650000226	153,00	6,7	0,826	4,7	472	254	1,21043	400
	500	450	3551650000207	138,00	3551650000227	158,00	7,1	0,895	5,0	514	277	1,20980	500
	550	500	3551650000208	144,00	3551650000228	164,00	7,5	0,964	5,4	556	299	1,20916	500
	600	550	3551650000209	148,00	3551650000229	168,00	7,9	1,033	5,7	598	322	1,20853	600
	750	700	3551650000305	179,00	3551650000309	199,00	9,2	1,241	6,7	724	390	1,20664	700
1496	400	350	3551650000210	144,00	3551650000230	164,00	7,5	0,911	5,3	553	297	1,21482	500
	450	400	3551650000211	147,00	3551650000231	164,00	8,0	0,994	5,7	582	313	1,21400	600
	500	450	3551650000212	150,00	3551650000232	167,00	8,5	1,077	6,0	631	339	1,21219	600
	550	500	3551650000213	156,00	3551650000233	170,00	9,0	1,160	6,4	679	365	1,21237	700
	600	550	3551650000214	164,00	3551650000234	178,00	9,5	1,243	6,8	728	391	1,21255	700
	750	700	3551650000306	191,00	3551650000310	189,00	11,0	1,491	8,0	875	471	1,20910	900
1775	400	350	3551650000215	163,00	3551650000235	182,00	8,8	1,070	6,2	633	339	1,21991	600
	450	400	3551650000216	169,00	3551650000236	188,00	9,4	1,167	6,7	689	370	1,21685	700
	500	450	3551650000217	174,00	3551650000237	193,00	10,0	1,264	7,1	745	400	1,21740	700
	550	500	3551650000218	181,00	3551650000238	200,00	10,6	1,360	7,6	802	430	1,21614	700
	600	550	3551650000219	188,00	3551650000239	207,00	11,2	1,457	8,0	858	461	1,21488	900
	750	700	3551650000307	213,00	3551650000311	232,00	12,9	1,747	9,4	1027	553	1,21111	1000

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt /50)ⁿ



Color: **R01-RAL 9010 WHITE**
with **ECO DIGITAL THERMOSTAT**

MATERIAL:

- 30x40 mm semi oval vertical collectors in painted mild steel.
- Ø 22 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.

User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders.
Certificate DIN 55900-1,-2.

COLOR:

R01-RAL 9010 WHITE.

ELECTRICAL RESISTORS:

Electrical resistors with white digital thermostat - Class 1 - IP44.
6 main functions: comfort, night, antifreeze, chrono, 2H timer and standby.

ELECTRICAL ONLY

☒ With digital thermostat

CERTIFICATIONS



FEATURES

Electrical resistors: **CLASS 1**

Minimum ingress protection: **IP 44**

Wire lenght: **1200 mm with Schuko plug**

Power supply: **230 Vac 50/60 Hz**

Seasonal energy efficiency η_s : **38% (with ECO DESIGN or PLUS DIGITAL THERMOSTAT)**

OPTIONAL



"PLUS" THERMOSTAT REMOTE CONTROL IR

Remote control of PLUS
digital chrono-thermostat
functioning

Art. nr. 515099000012

Price € 70,00

ACCESSORIES

For Accessories range see ACCESSORIES CHAPTER



**Towel Bar
White - R01**
Width= 370 mm

Applicable only for width ≥ 450 mm

Art. nr. 5991990310170


Price € 48,00




**Kit 2 Hooks
White - R01**

Art. nr. 5991990310171

Price € 30,00

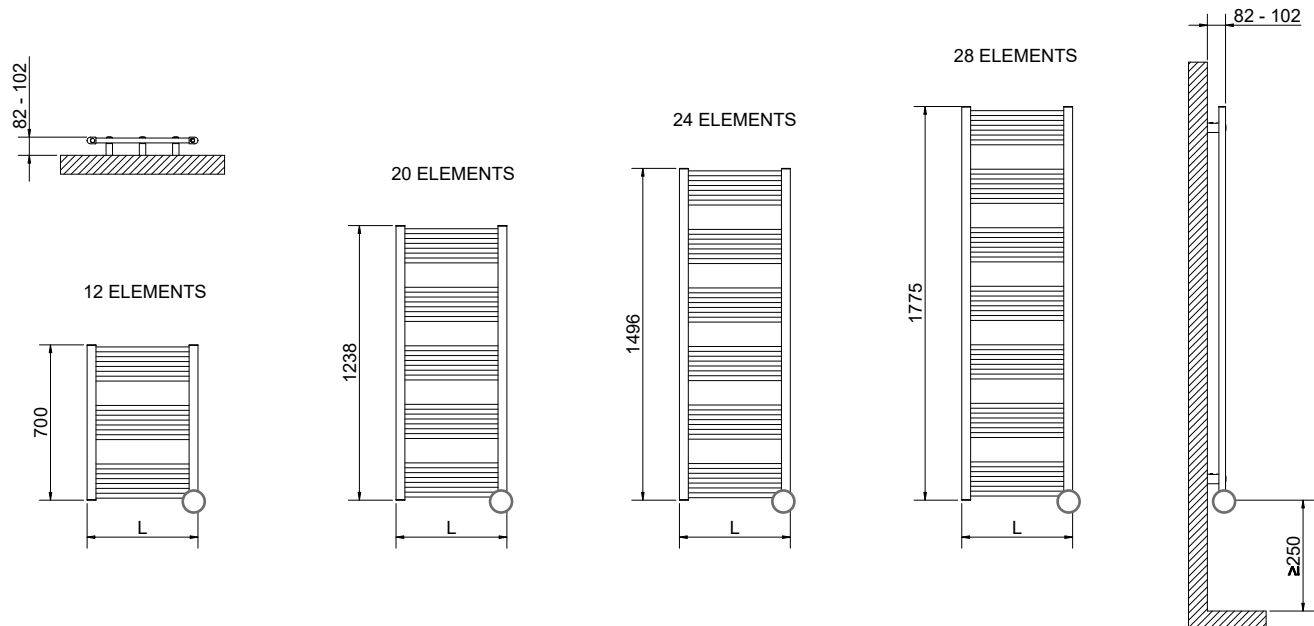


○ The total height has to be calculated considering the thermostat height.

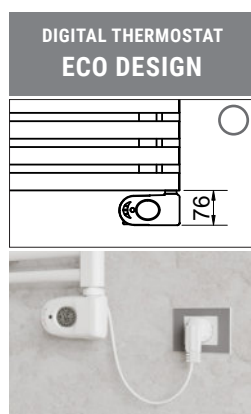

ROBERTA ELECTRIC ECO DESIGN


Height	Width	Art. nr.	Price [€]	Output	Weight
[mm]	L [mm]	White R01 RAL 9010		[Watt]	[Kg]
700	400	3581656100010	252,00	300	6
	500	3581656100011	258,00	400	8
1238	400	3581656100012	293,00	500	11
	450	3581656100013	299,00	600	12
1496	500	3581656100014	298,00	600	13
	400	3581656100015	320,00	700	14
1775	500	3581656100016	321,00	700	15
	500	3581656100017	350,00	900	18

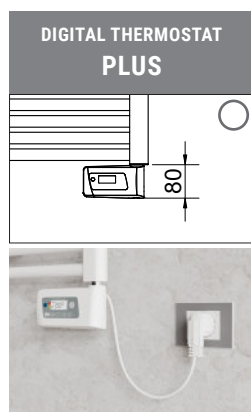

ROBERTA ELECTRIC PLUS

Height	Width	Art. nr.	Price [€]	Output	Weight
[mm]	L [mm]	White R01 RAL 9010		[Watt]	[Kg]
700	400	3581656100020	265,00	300	6
	500	3581656100021	271,00	400	8
1238	400	3581656100022	306,00	500	11
	450	3581656100023	312,00	600	12
1496	500	3581656100024	311,00	600	13
	400	3581656100025	333,00	700	14
1775	500	3581656100026	334,00	700	15
	500	3581656100027	363,00	900	18

Cordivari ErP electric radiators are characterised by high efficiency. These models comply with EU Regulation 2024/1103. The seasonal energy efficiency of these fixed electric space heating appliances, with nominal Thermal output >250 W, is over 46% in all models. Each of the ErP electric radiators is equipped with at least electronic temperature control, window opening detection, weekly programming and stand-by power consumption <0.5 W (or 2.0 W in Wi-Fi mode, where applicable).



HOW TO PLACE ELECTRIC RADIATORS

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



GENERAL SALES CONDITIONS AND WARRANTY

Sales of Cordivari's products are made according to the conditions listed below. Exceptions should be accorded in written by Cordivari Srl.

1. SHIPMENT

Goods are transported at buyer's risk and peril, even if they are shipped free of carriage. Goods have to be checked at the delivery about unaltered packaging, missing or confused products in the presence of the forwarder. Any claim has to be immediately communicated to the forwarder by appointing the shipment's document and by registered mail within 8 days from receipt of the goods (otherwise Cordivari Srl is cleared of his responsibilities).

2. DELIVERY TERMS

Delivery terms are indicative. Failure to comply with the agreed delivery terms for any reasons will not entitle the buyer to any compensation, cancellation or modification of the order without our prior consent. In case of strikes, lack in raw materials, or any other Act of God, Cordivari Srl reserves the right to decide proper countermeasures; in this case Cordivari Srl should be considered exempted from any responsibility. Shall ordered goods not be collected within agreed date, the same will be invoiced and stored with risks and costs charged to the customer.

3. DRY WEIGHT, MEASURES, SURFACES

Dry Weights, measures, surfaces, shapes, sizes, images and other figures related to the products are merely indicative and Cordivari Srl may at any time modify them.

4. ORDER CANCELLATION OR MODIFICATION

All orders are valid only if accepted in written form by Cordivari Srl. No orders shall be cancelled even partially without the consent of Cordivari Srl. It will not be possible to modify the order when the production has already started. Any cost deriving from the modifications or cancellation will be charge to the buyer.

5. RADIATORS/ACCESSORIES WARRANTY ON CONSTRUCTION DEFECTS

Cordivari Srl guarantees painted radiators, in the hot water/hydronic version, for a period of 5 years.

Electric towel warmers are covered by a warranty in accordance with the terms and conditions set forth by the national legislation implementing Directive 1999/44/CE.

All accessories, special products made upon specific request of the Customer, as well as residual items not expressly covered by the general sales conditions, are subject to warranty as established by the national legislation implementing the aforementioned Directive, with the exception of electrical and electronic components, for which the coverage is limited to a period of 12 months.

- The warranty period starts with the date of the delivery of the material by Cordivari and this warranty is invalidated if the code of the radiator with the date is removed or modified.
- Products that have become unusable due to proven manufacturing defects will be repaired or replaced free of charge, delivered to your location.
- Warranty is only valid if Cordivari S.r.l. is notified by registered mail about the fault within 8 days since delivery.
- Warranty will take effect after having examined the defects and their causes in the Cordivari plant.
- The materials that have to be replaced or repaired must be shipped free of charge to the Cordivari plant.

Warranty will be applicable at the following conditions:

- Materials must have been stored in good conditions and protected from the inclemency of the weather before installation;
- Radiator did not have damages during transport, handling or installation;
- No alterations or reparations must be done without the prior consent of the seller;
- The buyer must have paid all the bills within the pre-established deadlines;
- The installation must have been done by professionals and in conformity with all instructions on standards written on the technical data sheets provided by Cordivari S.r.l.;
- If for cleaning none of those aggressive, corrosive, substances not suitable for radiators material have been used;
- No periodical emptying or charging of the system must have taken place;
- Radiator has not been connected to a system with open expansion tank;
- No aggressive chemical substances must have been added to the water of the system;

- The working pressure and temperature shown in the catalogue must correspond to the current usage pressure and temperature.
- Heating system should be without any remaining of metals, calamine, grease, and without presence of gas;
- Before starting the heating system, make a rinse to cancel any residual from the installation/working;
- The caps and Accessories used must be original Cordivari materials;
- In case of using antifreeze, it should never be used pure, but it has to be diluted before including in the heating system;
- When you use anti-corrosion, it has to be compatible with all the material composing the heating elements of the radiator;
- Should the Customer make changes or modifications to the disputed materials on their own initiative without our prior approval, all liability of Cordivari Srl shall immediately cease;
- Warranty will not be valid in case of damages caused by electrical system;
- The warranty does not cover costs related to demolition, masonry work, or labor for the routing and installation of the products, either during installation or removal, nor the labor for any product replacements.

Cordivari Srl undertakes, during the warranty period, to replace the returned product recognized as defective due to verified manufacturing defects. Beyond this, the Customer shall not be entitled to any further compensation for damages, whether direct or indirect, of any kind, to persons and/or property resulting from such defects.

6. PAYMENTS

All invoices have to be paid according to the agreed deadline. Any delay, even partial may suspend the planned deliveries. Overdue interest could be charged at current rates.

7. GOODS' PROPERTY

Cordivari Srl remains owner of the delivered goods until they are not completely paid. In case of failure to proceed to the payment, Cordivari Srl could ask for immediate restitution of goods and keep the paid partial amount as indemnity. Cordivari Srl can reserve the right to evaluate bigger damages caused by the outstanding amount.

8. PRICES

Prices are not binding and can be modified without communication and can be modified on basis of the modifications which could appear before and during delivery. Prices are intended on FCA-MORRO D'ORO (Incoterm 2010 basis), except in case of written agreements. For some voluminous delivery Cordivari may charge some extra-costs. All prices indicated are V.A.T. excluded.

9. ORDERS/DELIVERY

The Order value is minimum Euro 2.000,00. Given orders are binding to the buyer, who acknowledges of all our sales conditions. Delivery is considered to customer main place/warehouse; for any different destination please get in touch with our sales dept.

10. COURT AUTHORITY

For the following Catalogue and conditions only the provisions of Italian law will be used. For controversy, the Court of Teramo (Italy) shall have exclusive competence. Essential and trial law shall be exclusively Italian.

11. ORIGINAL VERSION

Being a translation, the Italian language is the only valid language for interpretation and conditions of this catalogue version.

CONDIZIONI DI VENDITA E GARANZIA

La vendita dei prodotti viene effettuata conformemente alle sotto elencate Condizioni Generali di Vendita e Garanzia. Ogni deroga è subordinata all'accettazione scritta da parte della Cordivari Srl.

1. SPEDIZIONE

La merce viaggia a rischio e pericolo del Committente, anche se viene spedita franco destino. La merce deve essere verificata all'atto della CONSEGNA, controllando l'integrità dell'imballo, articoli mancanti o sostituzioni in presenza del trasportatore. Ogni contestazione dovrà essere segnalata immediatamente al trasportatore/corriere firmando con riserva il DDT e confermando tale riserva a mezzo lettera raccomandata o posta certificata entro otto giorni dal ricevimento merce.

2. TERMINI DI CONSEGNA

I termini di consegna si intendono puramente indicativi e comunque se il termine di consegna non potesse essere rispettato per qualsiasi motivo, il Committente non avrà diritto a esigere alcun indennizzo, pagamento di penali, annullamento o modifica all'ordine conferitoci. In caso di eventi straordinari quali calamità naturali, scioperi, mancanza di materie prime, e cause di forza maggiore, la Cordivari Srl si riserva la scelta delle misure da adottare. Se la merce ordinata non viene ritirata nel periodo concordato, questa verrà fatturata e immagazzinata con costi, rischio e pericolo a carico del Committente.

3. PESI, MISURE, SUPERFICI

Pesi, misure, superfici, forme, dimensioni, immagini e altri dati sono indicativi e non impegnativi e possono subire delle modifiche o variazioni che la Cordivari Srl si riserva di apportare ai suoi prodotti senza preavviso.

4. ANNULLAMENTO O MODIFICHE ORDINE

Senza il consenso scritto della Cordivari Srl, le ordinazioni conferite non possono essere né parzialmente né totalmente annullate o modificate. Non si accordano variazioni o modifiche quando è già stata intrapresa la lavorazione. Eventuali spese derivanti dall'annullamento o modifica dell'ordine saranno fatturate al Committente.

5. GARANZIA

Cordivari Srl garantisce i radiatori verniciati, nella versione ad acqua calda/idronica, per un periodo di 5 anni.

I radiatori scaldasalviette a funzionamento elettrico sono coperti da garanzia conformemente ai termini e alle condizioni previste dalla normativa nazionale di recepimento della Direttiva 1999/44/CE.

Tutti gli accessori, i prodotti speciali realizzati su specifica richiesta del Committente, nonché gli articoli residuali non espressamente contemplati nelle condizioni generali di vendita, sono soggetti a garanzia secondo quanto stabilito dalla normativa nazionale di recepimento della suddetta Direttiva, fatta eccezione per i componenti elettrici ed elettronici, per i quali la copertura è limitata a un periodo di 12 mesi.

- La garanzia decorre dalla data di consegna da parte della Cordivari Srl e decade se viene manomessa e/o rimossa l'indicazione del lotto di produzione. I prodotti diventati inutilizzabili per accertati difetti di costruzione saranno riparati o sostituiti gratuitamente franco Vostra destinazione.
- La condizione essenziale affinché la garanzia sia valida è che i difetti riscontrati siano notificati entro 8 (otto) giorni dal ricevimento della merce, per iscritto tramite raccomandata A/R o posta certificata.
- La garanzia sarà operante previo esame dei difetti e delle loro cause presso la sede della Cordivari Srl.
- Il materiale da sostituire o riparare dovrà essere consegnato franco magazzino presso la Cordivari Srl.
- Il materiale sia stato immagazzinato in buone condizioni e al riparo dalle intemperie prima di essere installato.
- Il radiatore non abbia subito danneggiamenti durante il trasporto, le movimentazioni o l'installazione.
- Non siano state effettuate manomissioni o riparazioni dei prodotti senza l'autorizzazione della Cordivari Srl.
- Il compratore abbia effettuato il saldo dei pagamenti nei termini prestabiliti.
- L'installazione sia stata realizzata da personale qualificato e in conformità alle istruzioni e alle norme indicate sulla documentazione tecnica fornita dalla Cordivari Srl e alle norme e prescrizioni impiantistiche generali e locali.
- Per la pulizia del radiatore non siano stati utilizzati detergenti aggressivi, abrasivi incompatibili con il materiale del corpo scaldante.
- Non siano stati effettuati svuotamenti o caricamenti periodici dell'impianto i prodotti non siano stati collegati ad impianti a circuito aperto o impianti sanitari.

- Non siano state effettuate aggiunte di sostanze chimiche aggressive all'acqua dell'impianto, valori guida secondo la normativa UNI 8065.
- La pressione e la temperatura di esercizio indicate sul catalogo corrispondano alla pressione e alla temperatura massime di utilizzazione.
- Il circuito sia esente da residui di metallo, calamina, grasso e non ci sia presenza di gas.
- Prima della messa in funzione dell'impianto, eseguire un lavaggio per eliminare residui di lavorazione meccanica e/o residui in fase d'installazione.
- I tappi e gli accessori utilizzati siano quelli regolarmente forniti dalla Cordivari Srl.
- Nel caso in cui si utilizzi l'antigelo, esso non dovrà mai essere utilizzato puro, ma diluito prima di essere introdotto nel circuito.
- Nel caso in cui si utilizzi un inibitore di corrosione, esso dovrà essere compatibile con tutti i materiali presenti nei corpi scaldanti.
- Qualora il Cliente esegua modifiche o variazioni di sua iniziativa sui materiali in contestazione senza il nostro preventivo benestare, decade immediatamente ogni responsabilità della Cordivari Srl.
- La garanzia inoltre non opera in caso di anomalie o guasti dipendenti dalla rete di alimentazione elettrica.
- La garanzia non copre costi dovuti a demolizioni, opere murarie, lavori per il passaggio e la collocazione dei prodotti sia in ingresso che in uscita e la manodopera per eventuali sostituzioni di prodotto.

Cordivari Srl si impegna durante il periodo di garanzia alla sostituzione del prodotto reso riconosciuto difettoso per accertati difetti di produzione, oltre a ciò il Committente non potrà vantare alcun altro risarcimento per spese di danno, diretti o indiretti di qualsiasi natura a persone e/o a cose derivanti da detti difetti.

6. PAGAMENTI

I pagamenti delle fatture relative alle forniture dovranno essere effettuati entro i termini di scadenza stabiliti. Il ritardo nel pagamento delle fatture, anche se parziale, dà luogo alla decorrenza degli interessi di mora nella misura del tasso corrente, oltre alla sospensione immediata delle spedizioni in corso e del processamento di eventuali ordini.

7. RISERVA DI PROPRIETÀ

I prodotti restano di proprietà della Cordivari Srl fino al pagamento dell'ultima rata di prezzo di merce consegnata. In caso di inadempimento anche parziale del compratore la Cordivari Srl potrà chiedere l'immediata restituzione della merce trattenendo comunque le rate pagate a titolo di indennità salvo il maggior danno.

8. PREZZI

I prezzi non sono impegnativi e possono essere modificati senza preavviso. I prezzi sono revisionabili in funzione delle variazioni che dovessero intervenire fino al momento della consegna.

I prezzi si intendono resa franco stabilimento di Morro D'Oro (TE), salvo diversi accordi.

I prezzi sono sempre riportati nel listino al netto di IVA.

Per modelli ingombranti la Cordivari Srl si riserva di chiedere una partecipazione alle spese di imballaggio e trasporto.

9. ORDINI/CONSEGNA

Per gli ordini con consegna unica con valore imponibile di minimo Euro 1000, la spedizione è esente da contributi di trasporto; per ordini di valore inferiori alla somma di Euro 1.000, e/o richiesta di spedizione parziale il cui valore è inferiore alla somma di Euro 1000, il contributo è del 6% con addebito minimo di Euro 25,00 per ogni singola spedizione. Gli ordini impartiti impegnano definitivamente il Committente che deve dichiarare di conoscere e accettare tutte le condizioni di vendita. Nel caso in cui il Committente rediga l'ordine per nome e per conto e in nome di altri, con la firma dell'ordine si impegna in solido all'adempimento di quanto da egli convenuto. La consegna si intende esclusivamente presso la sede/magazzino del Committente. Richieste particolari del Committente come: consegne espresso, consegna diversa dalla sede/magazzino, etc. avranno costi addizionali che verranno comunicati di volta in volta al nostro ufficio commerciale.

10. FORO COMPETENTE

Foro Competente. Per qualsiasi controversia derivante dal presente contratto o collegata allo stesso è competente il Foro di Teramo.

© Copyright Cordivari Srl

Tutti i diritti, in particolare quelli di riproduzione, diffusione e traduzione sono riservati. Nessuna parte di questa opera può essere ristampata o riprodotta in qualsiasi altra forma senza l'autorizzazione scritta della Cordivari. Il presente catalogo sostituisce ed annulla tutte le edizioni precedenti. La società si riserva la facoltà di modificare in qualsiasi momento i prodotti e i dati riportati a catalogo e non risponde degli eventuali errori tipografici. Le schede prodotto e i cataloghi riportati sul sito web aziendale sono sempre aggiornate all'ultima versione.



FOLLOW US



www.cordivari.com

CORDIVARI SRL

Zona Ind. Pagliare 64020 Morro D'Oro (TE) Italia • cordivari.it • Tel. +39 085 80401 Fax +39 085 8041418
C.F.-P.IVA-VAT Id nr. IT00735570673 • REA TE Nr.92310 • Cap. Sociale € 10.000.000,00 i.v. • UNI EN ISO 9001 • 14001 • 45001

